



Model No.: GP55AAAH


Type	: Rechargeable Nickel Metal Hydride Cylindrical Cell
Nominal Dimension (with Sleeve)	: $\Phi = 10.5\text{mm}$ $H = 43.7\text{mm}$
Applications	: Recommended discharge current 55 to 1650mA
Nominal Voltage	: 1.2V
Capacity	: Rated: 550mAh Typical: 560mAh When discharged at 110mA to 1.0V at 20°C
Charging Condition	: 55mA for 16 hrs at 20°C
Charging Retention	: 50% of rated capacity after cell storage at 20°C for 12 months When discharged at 110mA to 1.0V at 20°C
Fast Charge	: 275mA to 550mA (0.5 to 1C) charge termination control recommended control parameters: - ΔV : 0-5mV DT/dt : 0.8°C/min (0.5 to 0.9C) 0.8 - 1°C/min (1C) TCO : 45 - 50°C Timer : 105% nominal input (for ref. only)
Service Life	: > 500 cycles (IEC standard)
Continuous Overcharge	: 55mA maximum current for 1 year. No conspicuous deformation and/or leakage
Weight	: 13.0g
Internal Resistance	: Average 50m Ω upon fully charged (Max. 70m Ω) at 1000Hz
Max. Charging Voltage	: 1.5V at 55mA charging
Ambient Temperature Range	: Standard Charge : 0 to 45°C Fast Charging : 10 to 45°C Discharge : -20 to 50°C Storage : -20 to 35°C

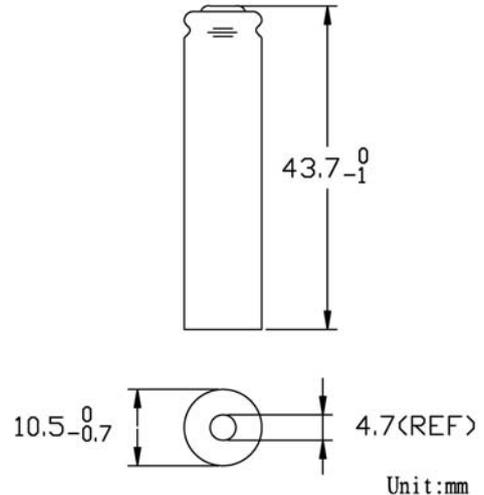


Low Rate Discharge

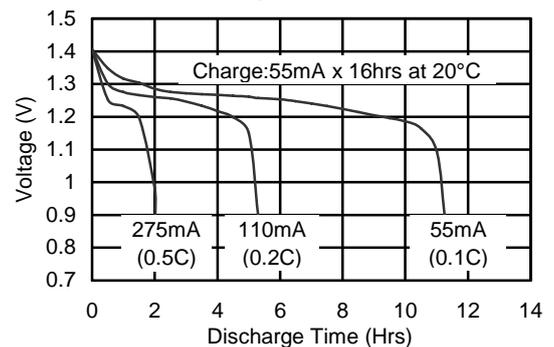

High Rate Discharge

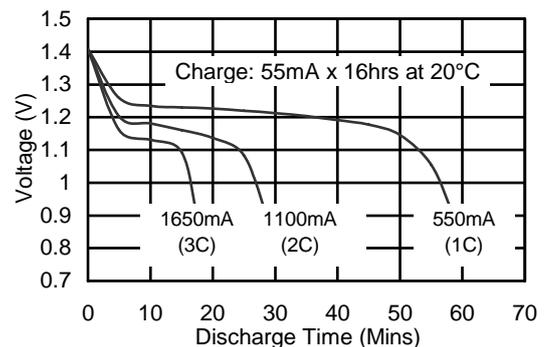

Fast Charge (Charge Control Required)

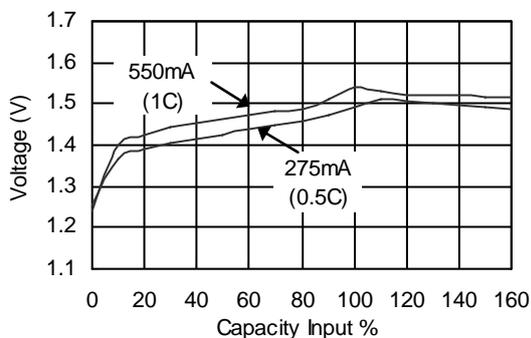

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.