
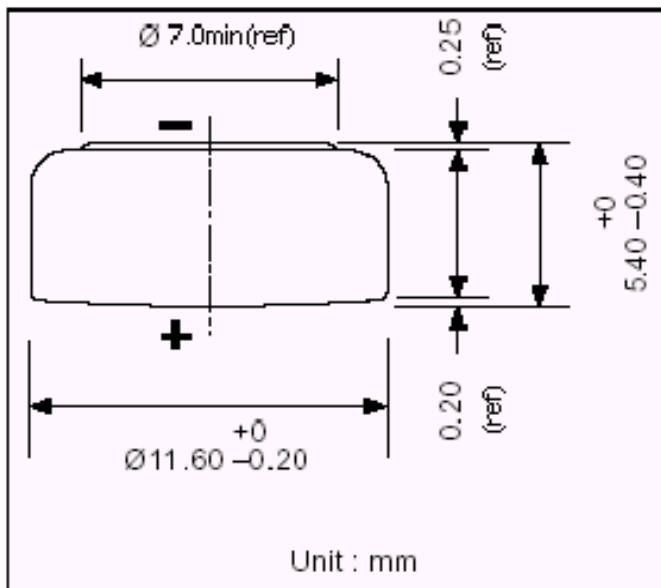
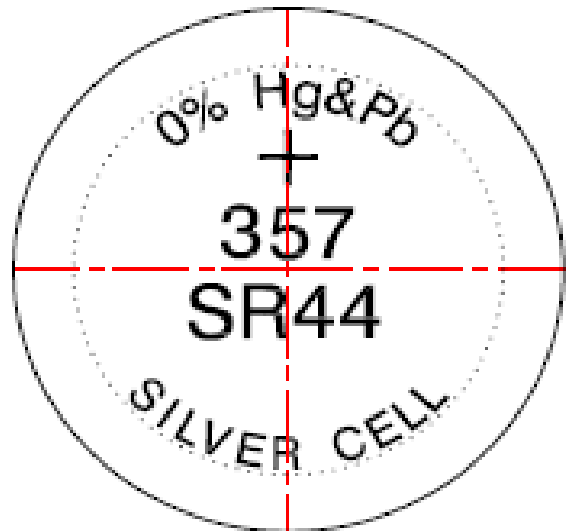


Description	: Mercury and Lead Free Alkaline Battery
Chemical System	: Zinc/Silver Oxide
Nominal Voltage	: 1.55V
Nominal Dimension	: Φ 11.60mm \times 5.40mm
Applications	: Analog watch
Average Weight	: 2.30 g
Shelf Life	: Not less than 90% of the service capacity within first year, Not less than 85% of the service capacity within second year storage at $20 \pm 2^\circ\text{C}$ Max 85 %RH.
Date Code	: Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
Close Circuit Voltage	: 1.30 V (min.) (load resistor 200Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)
Lot Acceptance Test	: 165 mAh (load $3.0 \text{ k}\Omega$ to cut off 1.2 V under $20 \pm 2^\circ\text{C}$)
Service Output Test	: 620Hr (load $6.8 \text{ k}\Omega$ to cut off 1.2V under $20 \pm 2^\circ\text{C}$)

Model No.: **GP357F**

Typical Discharge curve at $20 \pm 3^\circ\text{C}$

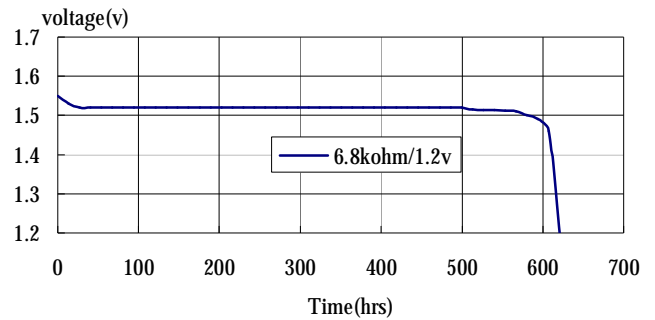

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.